


EATERS V

ODOR CONTROLLER & WASTE DEGRADER



CONTAINS LIQUID LIVE BACTERIA CULTURES THAT ARE CAPABLE OF GENERATING 400 BILLION COLONIES PER GALLON. EATERS V IS A CHLORINE, BLEACH, AND HEAT RESISTANT.

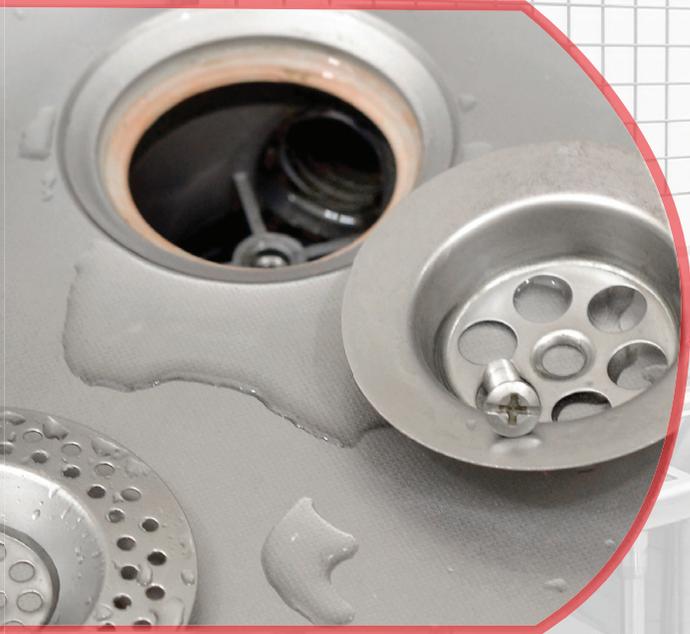

BENEFITS-FEATURES:

- Digests complex organic waste compounds
- Culture grows in presence or absence of air
- Reduces suspended solids
- Reduces odors

ADVANTAGES:

- Up to 400 billion colonies per gallon
- Non-pathogenic
- Non-polluting
- Non-toxic
- Non-acid
- Non-alkaline



WHERE TO USE:

EATERS V is a perfect solution to prevent and resolve organic waste matter blockages in grease traps and pipelines.

RECOMMENDED FOR:

- Grease traps
- Drain lines
- Restaurants
- Manufacturing
- Maintenance
- Porta-potty
- Septic tanks

EATERS V

ODOR CONTROLLER & WASTE DEGRADER



DIRECTIONS:

GENERAL DEODORIZATION: Spray product directly on malodor.

URIC ACID ODOR ELIMINATION: Remove solid matter. Spray directly on surfaces at location of odor. Works well on floor and wall around urinals and commodes.

GREASE TRAPS: For traps up to 500 gallon capacity, pour 4-5 oz. or as determined to be needed, on each day of use, in the sink or pipeline. This should be done when the lines are least used. Flush down with a cup of lukewarm water. For 500-1000 gallon traps, use 11-14 oz. For 1,000-2,000 gallon capacity traps, use 17-21 oz. in all situations use the same procedure. For convenience and best results, use our computerized pump system.

SEPTIC TANKS: Add 1 pint per 25 cu. ft. capacity, initially. Then use 8 oz. per week. Pour directly into toilet and flush. If a septic tank is clogged; add 1 gallon of product to tank through manhole.

RECREATIONAL VEHICLES AND BOATS: Add 2 oz. per gal. of water in hold tank, then use 1 oz. per gal as needed. For dump stations, use 1 oz. per 50 gals. of tank capacity. One pint per week for maintenance.

PORTA-TOILETS AND OUTHOUSES: Add 1 gal. and cover solids with water to aid digestion. Repeat treatment each time toilet is pumped.

DRAIN LINES & DOWN PIPES: Use products as listed below. Start on lowest floor and work 1 floor every day. Do not treat same floor twice. When top floor is reached, treat from top floor only.


PIPE SIZE	DOSAGE	FREQUENCY
2"	4 oz.	Twice a week
4"	8 oz.	Twice a week
6"	12 oz.	Twice a week
8"	16 oz.	Twice a week




Waste accumulates in your pipes causing slow clogged drains.



EATERS begins to restore drain flow to full capacity within days.



Monthly Eaters treatments keep drains clean and flowing trouble free.

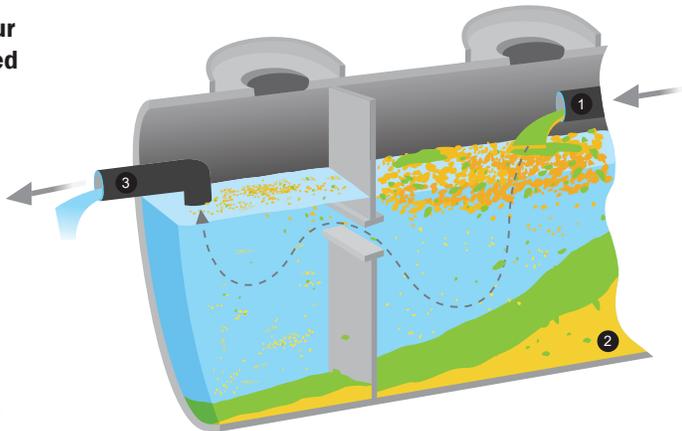

Eaters will help maintain your grease trap. Eaters establishes a smooth flow to the main sewer working throughout the trap digesting waste and sludge build-up successfully reducing foul odors and potential backups.

① Drain Line ② Sludge ③ Main Sewer

● EATERS

● FOG (FATS, OILS & GREASE)



S4900-E: 12 quarts per case



S4900-A: 55-gallon container

WWW.HANDI-CLEAN.COM
PHONE: 336-292-3083

504 Radar Rd
Greensboro, NC 27410